


FEATURES

- * POWDER COATED VENTILATED ENCLOSURE
- * EASY MOUNTING
- * CONNECTOR FOR EXTERNAL CONNECTIONS
- * ANTI CONDENSATION FOR CONTROL PANELS


CHARACTERISTICS

Voltage	:	240V AC
Wattag	:	40W to 100W
Insulation resistance	:	1000M Ohms at 500V DC
Dielectric strength	:	2 KV for 60 seconds
Temperature rise	:	150 Deg C above ambient

DIMENSIONS(mm)

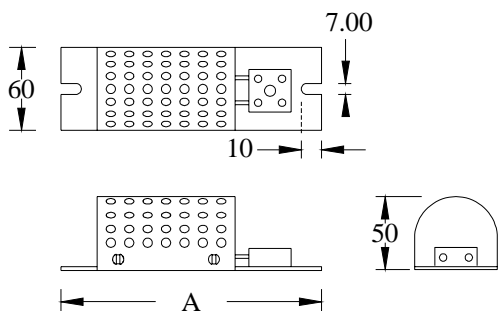

DERATING CURVE

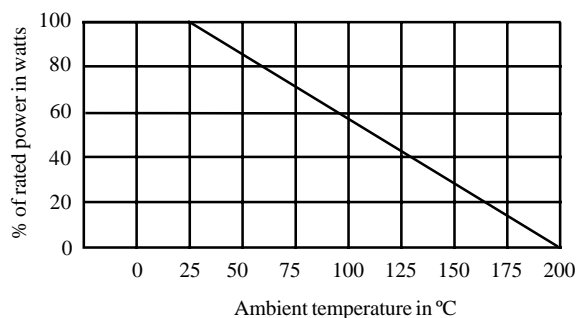

TECHNICAL SPECIFICATIONS

Type no.	Rated Power	A(mm)
VAH 40	40W	140.0
VAH 60	60W	140.0
VAH 80	80W	140.0
VAH 100	100W	160.0